



Vehicle figures	
Chassis	IVECO MAGIRUS EuroCargo 110 E 25 W / 150 E 25 W 4x4
Engine [HP]	185 kW / 251 HP
Wheelbase	3,690 mm / 3,915 mm
Cab, seats	All steel technology, 1+8
Gross weight	11,000 / 12,000 / 15,000 kg

GENERAL:


- Internal water tank for maximum equipment storage capacity
- MAGIRUS CAN-bus technology, FireCan compatible
- MAGIRUS HMI comfort control panels for very easy handling
- Crew cabs: all-steel or aluminium technology
- Seats configuration: 1+5, 1+8

ALUFIRE-3 BODYWORK:

- Pump capacity: 1,000 l/min. at 10 bar
- Water tank volume: 600 l (1,000 l, 1,200 l)

OPTIONS:

- Alternative warning and signalling systems
- Loading variants LF or HLF
- Light mast: pneumatic, 2 x 1,000 Watt or Xenon
- Lighting: LED technology
- Warning system: integrated magirus M-Flash, LED technology
- Hygiene board, pull-out
- Breathing apparatus in the cab: 5 sets
- Pressure foam proportioning system: electrical CaddiSys or mechanical FireDos
- Tank volume, foam compound: 120 / 150 / 200 l
- Traffic warning lights LED
- Wide ranging additional equipments possible
- Body may be also mounted on any suitable chassis make
- Pump capacity: 2,000 l/min at 10 bar

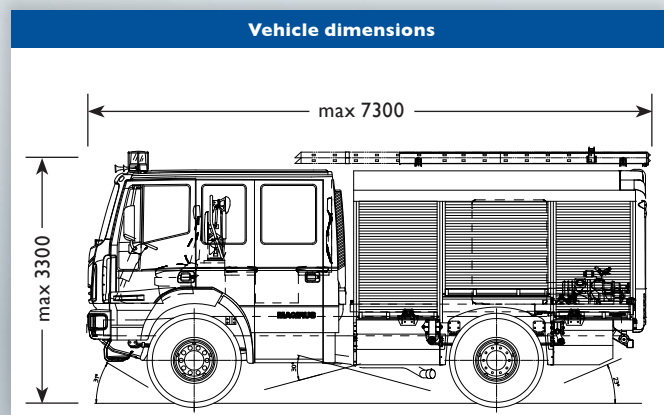

ADVANTAGES / SPECIAL FEATURES:

- Generously dimensioned bodywork with 3 side roller shutters
- Lowered bodywork between the axles and behind the rear axle
- Pump easy access from the rear for control and maintenance
- Large reserves of space in the bodywork for local loading requirements and individual equipment
- IVECO chassis with standard all-wheel drive and single tyres with same track width