



Vehicle figures	
Chassis	IVECO MAGIRUS EuroCargo 150 E 25/30 W 4x4
Engine [HP]	220 kW / 299 HP / 185 kW / 250 HP
Wheelbase	3.915 oder 4.150 mm
Cab, seats	All steel technology, 1+8
Gross weight	14.500 kg / 15.000 kg

GENERAL:


- Internal water tank for maximum equipment storage capacity
- MAGIRUS CAN-bus technology, FireCan compatible
- MAGIRUS HMI comfort control panels for very easy handling
- Crew cabs: all-steel or aluminium technology
- Seats configuration: 1+5, 1+8

ALUFIRE-3 BODYWORK:

- Pump capacity: 2.000 l/min at 10 bar
- Water tank volume: 1.600 l – 3.000 l
- Light mast: pneumatic, 2 x 1.000 Watt 230 Volt halogen flood lights or other masts

OPTIONS:

- Lighting: LED technology
- Warning system: integrated magirus M-Flash, LED technology
- Traffic warning lights LED
- Engine and gearbox variants
- Single or twin tires
- Alternative warning and signalling systems
- Loading variants LF or HLF
- Wide ranging additional equipments possible
- Body may be also mounted on any suitable chassis make
- Hygiene board, pull-out
- Pressure foam proportioning system: electrical CaddiSys or mechanical FireDos
- Foam tank volume: 120 / 150 / 200 l
- Ladder on roof with unloading device

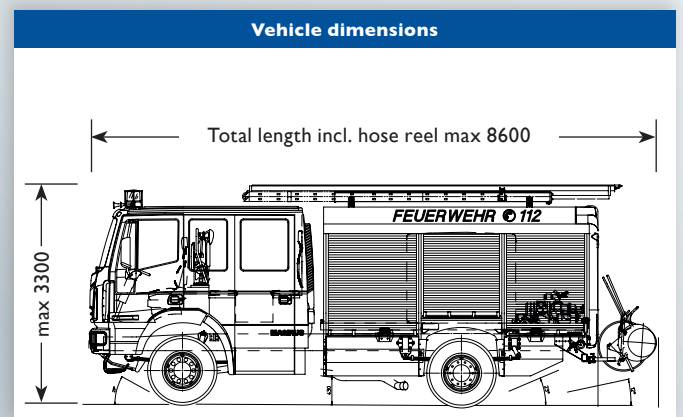

ADVANTAGES / SPECIAL FEATURES:

- Generously dimensioned bodywork with 3 side roller shutters
- Lowered bodywork between the axles and behind the rear axle
- One man hose reel (2 units) and light mast at the rear possible
- Optimum water tank assembly ensure no overloading of the rear axle
- Pump easy access from the rear for control and maintenance
- Large reserves of space in the bodywork for local loading requirements and individual equipment